

Shock cord

Shock cord is a tubular form elastic
The cover is manufactured of polyester.



General information

| | |
|---------------------|---------------|
| Shock load | Reasonable |
| Handiness | Excellent |
| Durability | Excellent |
| Rot proof | Excellent |
| UV-resistance | Excellent |
| Resistance to acids | Excellent |
| Alkali resistance | Excellent |
| Abrasion resistance | Excellent |
| How to storage | Wet / dry |
| Buoyancy | Sinks |
| Melting point cover | Approx. 245°C |


Standard supply possibilities:

| <i>Diameter</i> | <i>Colour</i> |
|-----------------|---|
| 3 up till 12mm | White base with coloured identification marks |
| 3 up till 12mm | Black |

Shock cord

Colour of the cover: white base with identification mark

| <i>Diameter</i> | <i>Breaking load in kg.</i> | <i>Buying unit</i> | <i>Article number</i> |
|-----------------|-----------------------------|--------------------|-----------------------|
| 3 mm | 45 | reel 100 meter | V.35.00.80.03 |
| 4 mm | 70 | reel 100 meter | V.35.00.80.04 |
| 5 mm | 90 | reel 100 meter | V.35.00.80.05 |
| 6 mm | 150 | reel 100 meter | V.35.00.80.06 |
| 8 mm | 300 | reel 100 meter | V.35.00.80.08 |
| 10 mm | 400 | reel 100 meter | V.35.00.80.10 |
| 12 mm | 500 | reel 100 meter | V.35.00.80.12 |

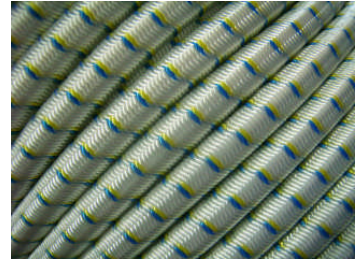

Colour of the cover: black

| <i>Diameter</i> | <i>Breaking load in kg.</i> | <i>Buying unit</i> | <i>Article number</i> |
|-----------------|-----------------------------|--------------------|-----------------------|
| 3 mm | 45 | reel 100 meter | V.35.00.62.03 |
| 4 mm | 70 | reel 100 meter | V.35.00.62.04 |
| 5 mm | 90 | reel 100 meter | V.35.00.62.05 |
| 6 mm | 150 | reel 100 meter | V.35.00.62.06 |
| 8 mm | 300 | reel 100 meter | V.35.00.62.08 |
| 10 mm | 400 | reel 100 meter | V.35.00.62.10 |
| 12 mm | 500 | reel 100 meter | V.35.00.62.12 |

